

# DISPLAY

## HI-END SERIES



### HIGH-END INTERACTIVE DISPLAY



## ANGUSTOS PRESENTATION SWITCH

ANGUSTOS flexible presentations switches are customized with many unique features to meet various demands from traditional presentation devices switching to advanced collaboration in corporate or education usage.

This series features user friendly control methods with plug-and-play principal. This even support the wireless touch back on interactive whiteboard/touch screen, support up to 4 split screen view at the same time for collaboration presentation.

Future-proof with Type-C connector for direct or wireless dongle help to eliminate messy cable routing in the meeting room. The series also support corporate rate data security with dual network, encryption on both input and outputs plug-in.



## ANGUSTOS APS SERIES

- Media - Telecom - Broadcast
- Education - Training
- Manufacturing - Quality Control
- Retail - Advertising
- Meeting Room - Conference
- Healthcare visual system
- Entertainment
- Government - Control Room




## WIRELESS PRESENTATION SWITCH

Model : AWP-4T1S

### FEATURES

- Wireless presentation switch with multiple connections
- Direct connection to device, no cable messy - up to 50m\*
- Wireless content input up to 1080P, HDMI 2.0 output
- Support native wireless mirroring (Airplay, Miracast, Chromecast)
- Support plug-in-display HDMI/ USB-A /Type-C dongles
- Support Android. MAC and Windows APP
- Support MPiP™ 4 / 9 split screen view. Seamless 20ms switch
- Support wireless touch back on interactive whiteboard/touch screen
- Best-in-class data security encryption.
- Support whiteboard and annotation.
- 3.5mm audio port for speaker set up
- BYOM function (USB Camera/Microphone/Speaker)
- Extended Desktop Screencasting support
- Wired/Wireless bridging

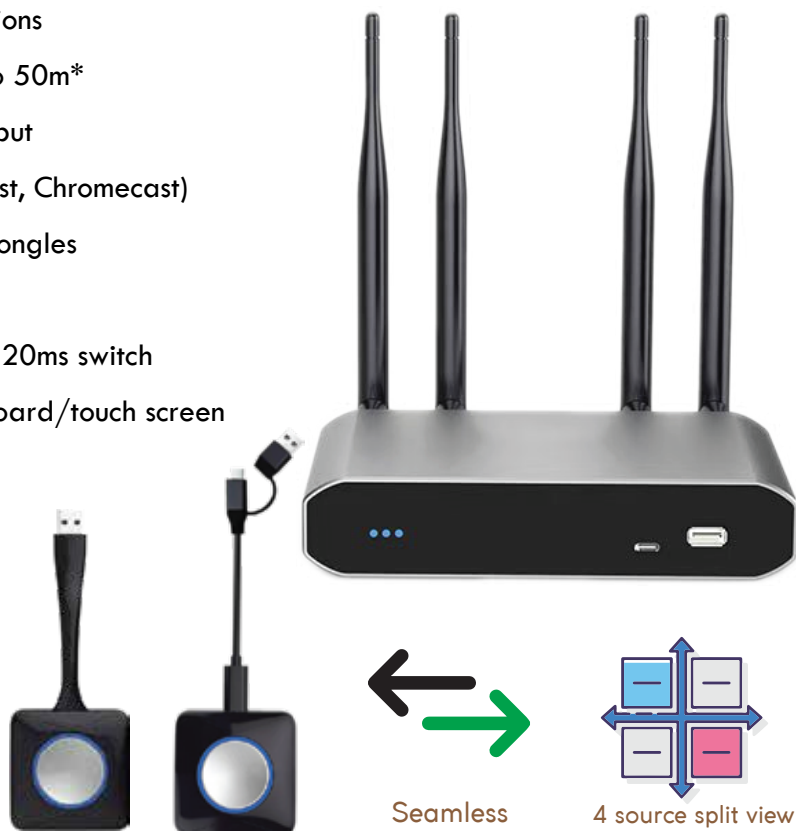

### SYSTEM SPECIFICATION

	Output x 1 - Input x 1
Video output resolution	3840 x 2160 @ 60Hz
	1920 x 1080 @ 60Hz
HDMI Standard	HDMI 1.4 / 2.0
Wireless resolution	1080p@60Hz / 30Hz
HDCP Standard	HDCP 1.4 / 2.2
Audio Out	3.5mm female x 1
Ethernet	RJ-45 x 1 (Gigabit)
USB	USB 2.0 x 2
	USB-C (2.0) x 1
Audio Input	AirPlay, Windows, WMH
Audio Output	3.5 mm Audio out
	HDMI audio out
USB Playback	Support media reading
Total video on screens (max)	9
Simutaneous connection	64
Playback frame rate	20 - 60 FPS

Latency	20 - 150 ms
WIFI Data Rate	Wifi 6 2T2R / 1200Mbps
Wireless protocol	IEEE 802.11 b/g/n/ac/ax
Frequency	2.4 GHz & 5 GHz
WIFI Antenna	MIMO 2 x 2
CPU	Quad-Core 1.8GHz
Control Method	Web GUI, Telnet
Casting	Airplay/BYOM/BYOD
Power	DC 12V - 2A
Dimension	180 x 40 x 110.9 mm
Weight	0.4 kg
Power consumption	6 ~ 15 Watt
Temp (Working) / Storage	0~45°C / -20~60°C
Humid (Working/Storage)	0-90% RH - non condensing
Power Rate for adapter	100 - 240 VAC. 50-60Hz
Wirelss distance (Optimal)	20 m with 5GHz
	30-50 m with 2.4Ghz

## WIRELESS PRESENTATION SWITCH

Model : AWP-4T1S

### CONNECTION DIAGRAM



PC



Laptop



Tablet



Mobile



USB Dongle



USB Dongle



HDMI Dongle



Type - C Dongle



\*Up to 50m (open area)



HDMI

RJ-45 (Cat5e/6)

Switch