


# 8-PORT DB-15 KVM SWITCH OVER IP AD-V08U

## Features

- 8 port IP-based Cascadable 19" Rackmount USB PS/2 KVM Switch
- Port capacity scalable up to a maximum of 128 computers
- PS/2 local [analog] console for local rack server management
- USB and PS/2 Dual Interface Support on PC side
- Multiple users can login in a same remote server desktop
- Total control over the remote server from BIOS level up to GUI applications
- Ultra-security using full 1024-bit PKI Authentication / 256-bit SSL encryption
- Work with LDAP / RADIUS / Active Directory Servers
- Options for Automatic video centering and optimization Hi-Speed PPP Connection
- Serial commands configurable to fit all serial power control devices
- Power ON-OFF privilege only for the SUPER ADMIN users Security
- 1024-bit Public key Authentication using certificates generated by an external CA
- 256-bit SSL Encryption for keyboard, mouse and video signal transmissions

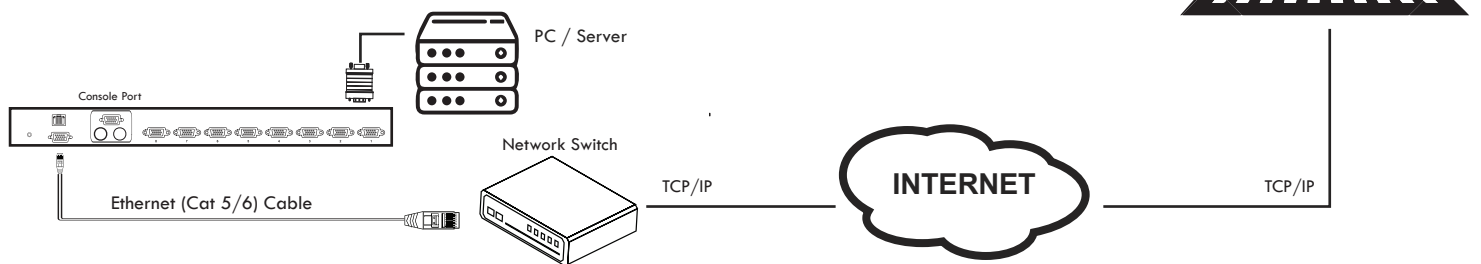

## KVM SWITCH MODULE

|                       |                                |
|-----------------------|--------------------------------|
| Direct PC connection  | 8                              |
| Maximum PC Connection | 128                            |
| Port Selection        | OSD, Button, Hot Key, IPViewer |
| Console Connector     | PS/2. Remote : LAN             |
| KVM Connector         | HDB-15 Female x 8              |
| Serial Port           | 2 x RJ12 Female                |
| Keyboard & Mouse      | Emulation                      |
| Daisy Chain Port      | HDB-15 Female                  |
| Status LEDs           | PC LED : 8 Green + 8 Red       |
|                       | Power : 1 Red                  |

## OPERATIONAL SPECIFICATION

|                |                          |
|----------------|--------------------------|
| Operating Temp | 0°C - 40°C               |
| Storage Temp   | -20°C - 60°C             |
| Humidity       | 0-90%RH, No Condensation |

## PHYSICAL SPECIFICATION

|           |                       |
|-----------|-----------------------|
| Housing   | Metal                 |
| Dimension | 408.5 x 165 x 45 (mm) |
| Weight    | 2.4 Kg                |