

PRO - AV

HI-END
SERIES



HIGH-END DIGITAL SIGNAGE SYSTEM



Why choose ANGUSTOS Pro-AV ?

We can provide you the best solution that suits your TVs, interactive screens, meeting room high-end projector, digital signage and videowall system. We do not just simply sell the equipments but also a smart solution that is just as well designed as it is functional. Solutions that guarantee and define our brand:


- Ease-of-use
- Design
- Innovation
- Reliability
- Ease-of-installation.

To help you find the exact solution you need, Angustos has an extensive product range that is possible to compose a solution for nearly every Pro AV application. Our highly skill solution teams are happy to help you to quickly find the best solution for your installation, saving you the time and effort and hassle for complex system.



ANGUSTOS PRO AV APPLICATIONS

- Media - Telecom - Broadcast
- Education - Training
- Manufacturing - Quality Control
- Retail - Advertising
- Meeting Room - Conference
- Healthcare visual system
- Entertainment
- Government - Control Room

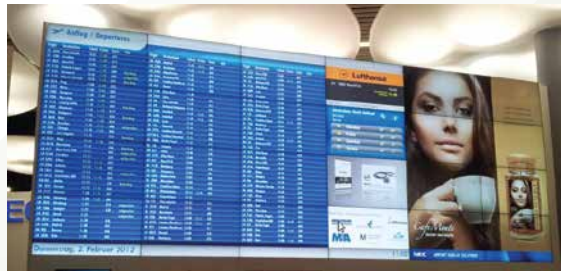

4K@60Hz 2x1 HDMI Switcher with Multi-Viewer Model : AHAS-H0201K6M

FEATURES

- HDMI 2.0b, HDCP 2.2 / HDCP 1.x
- 18Gbps bandwidth with Advanced EDID management
- Input/ output resolutions up to 4K2K@60 4:4:4
- Support LPCM, AC3, DD+, DTS, DTS-HD, 7.1 audio
- Seamless switching with multi-view
- 4 display modes: SINGLE, PIP, PBP (1), PBP (2)
- Audio de-embedding analog /optical fiber
- Volume control independent audio selection
- Panel buttons, IR remote, OSD, RS-232 commands



HDMI
HIGH DEFINITION MULTIMEDIA INTERFACE

EDID

DOLBY
TRUEHD



MULTIVIEW

PACKAGE CONTENT

- 1 x Switch unit
- 1 x 12V/1A Adapter
- 1 x IR Remote
- 1 x User Manual



SPECIFICATION

Operating Temperature	-0° to 40°C
Operating Humidity	20 to 90% RH
Video Input Connectors	2 x HDMI
Video Output Connectors	1 x HDMI
Input / Output Resolution	4K @ 60Hz - 4:4:4
Data Rate/Pixel Clock-Impedance	18 Gbps / 100 Ω
Audio Format Support	LPCM 2/5.1/7.1, analog, Dolby Digital/Plus, DTS, DTS High Res, SPDIF, PCM 2.0
Control	Button / IR Remote / RS-232

Standard	HDMI 2.0b / HDCP 2.2
Color Space	RGB, YCbCr 4:4:4
Color Depth	8 bit
ESD	±8kV (Air-gap discharge) ±4kV (Contact discharge)
Power Supply	AC 100 - 240V 50/60Hz DC 12V/1A
Power Consumption	4.56 W (max)
Dimension (L x W x H)	175 x 100 x 30 mm

CONNECTION DIAGRAM

