

PRO - AV

HI-END SERIES



HIGH-END DIGITAL SIGNAGE SYSTEM



Why choose ANGUSTOS Pro-AV ?

We can provide you the best solution that suits your TVs, interactive screens, meeting room high-end projector, digital signage and videowall system. We do not just simply sell the equipments but also a smart solution that is just as well designed as it is functional. Solutions that guarantee and define our brand:


- Ease-of-use
- Design
- Innovation
- Reliability
- Ease-of-installation.

To help you find the exact solution you need, Angustos has an extensive product range that is possible to compose a solution for nearly every Pro AV application. Our highly skill solution teams are happy to help you to quickly find the best solution for your installation, saving you the time and effort and hassle for complex system.



ANGUSTOS PRO AV APPLICATIONS

- Media - Telecom - Broadcast
- Education - Training
- Manufacturing - Quality Control
- Retail - Advertising
- Meeting Room - Conference
- Healthcare visual system
- Entertainment
- Government - Control Room

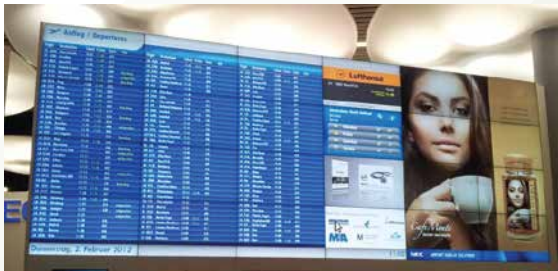

HDMI MATRIX SWITCH WITH QUADVIEW

Model : AHAS-H0401M

FEATURES

- Compliant HDCP 1.4 / HDMI 1.4 / VGA loop
- Input resolution automation
(480p~1080P60, 800x600~1920x1080)
- Output resolution select (button/ remote control)
1080P@60Hz / 720P@60Hz
- Audio supports LPCM 2CH
- Supports 1/2/4 windows multi-view modes
- Control with panel button and remote control

PACKAGE CONTENT

- 1 x Matrix Quadview
- 2 x Mounting Ears
- 1 x IR Remote
- 1 x 12V/1A Adapter
- 1 x User Manual

SPECIFICATION

Operating Temperature	-0° to 40°C
Operating Humidity	20 to 90% RH
Video Input Connectors	4 x HDMI
Video Output Connectors	1 x HDMI / 1 x VGA
Input / Output Resolution	1920x1080 @ 60Hz
Data Rate/Pixel Clock-Impedance	4.95 Gbps / 100 Ω
Audio Format Support	LPCM 2.0 (3.5mm connector) 44.1KHz - 48KHz
Control	Button / IR Remote

Standard	HDMI 1.4/ HDCP 1.4
Color Space	RGB, YCbCr 4:4:4
Color Depth	8 bit
ESD	±8kV (Air-gap discharge) ±4kV (Contact discharge)
Power Supply	AC 100 - 240V 50/60Hz DC 12V/1A
Power Consumption	5.3 W (max)
Dimension (L x W x H)	185 x 111.8x21 mm



QUADVIEW



CONNECTION DIAGRAM

