

# PRO - AV

## HI-END SERIES



### HIGH-END DIGITAL SIGNAGE SYSTEM



## Why choose ANGUSTOS Pro-AV ?

We can provide you the best solution that suits your TVs, interactive screens, meeting room high-end projector, digital signage and videowall system. We do not just simply sell the equipments but also a smart solution that is just as well designed as it is functional. Solutions that guarantee and define our brand:


- Ease-of-use
- Design
- Innovation
- Reliability
- Ease-of-installation.

To help you find the exact solution you need, Angustos has an extensive product range that is possible to compose a solution for nearly every Pro AV application. Our highly skill solution teams are happy to help you to quickly find the best solution for your installation, saving you the time and effort and hassle for complex system.



## ANGUSTOS PRO AV APPLICATIONS

- Media - Telecom - Broadcast
- Education - Training
- Manufacturing - Quality Control
- Retail - Advertising
- Meeting Room - Conference
- Healthcare visual system
- Entertainment
- Government - Control Room

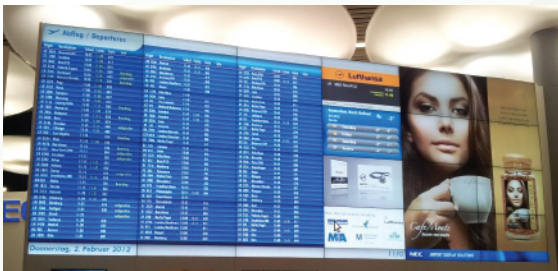

## Digital to Analog Audio Converter Model : AHVC-ADA

### FEATURES

- Optical and Coaxial Inputs
- Converts digital audio from the TV to an analogue signal
- Left and Right channel analogue audio outputs
- Supports non-compressed digital stereo audio
- Compatible with a wide range of sampling rates
- Compact size and light weight
- LED power on indicator
- 1 m Optical TOSLINK cable included



### SPECIFICATION

|                            |                        |
|----------------------------|------------------------|
| <b>Input</b>               | Optical, Coaxial       |
| <b>Output</b>              | 2 x RCA                |
| <b>Data Sampling Rates</b> | 32, 44.1, 48, 96 kHz   |
| <b>Power Supply</b>        | 5 V, 2 A DC /110-240 V |
| <b>Power consumption</b>   | 0.5W                   |
| <b>Dimension</b>           | 51mm x 41mm x 26mm     |
| <b>Weight</b>              | 78g                    |

|                                    |  |
|------------------------------------|--|
| <b>Storage temperature</b>         | -20°C ~ 60°C<br>-4°F ~ 140°F                       |
| <b>Humidity</b>                    | 20 ~ 90% RH (Non-condensing)                       |
| <b>Operating Temperature</b>       | 0°C ~ 40°C<br>32°F ~ 104°F                         |
| <b>Digital Interconnect Format</b> | S/PDIF 24 bit, Dual channel,<br>uncompressed audio |

### CONNECTION DIAGRAM

