

PRO - AV

HI-END SERIES



HIGH-END DIGITAL SIGNAGE SYSTEM



Why choose ANGUSTOS Pro-AV ?

We can provide you the best solution that suits your TVs, interactive screens, meeting room high-end projector, digital signage and videowall system. We do not just simply sell the equipments but also a smart solution that is just as well designed as it is functional. Solutions that guarantee and define our brand:


- Ease-of-use
- Design
- Innovation
- Reliability
- Ease-of-installation.

To help you find the exact solution you need, Angustos has an extensive product range that is possible to compose a solution for nearly every Pro AV application. Our highly skill solution teams are happy to help you to quickly find the best solution for your installation, saving you the time and effort and hassle for complex system.



ANGUSTOS PRO AV APPLICATIONS

- Media - Telecom - Broadcast
- Education - Training
- Manufacturing - Quality Control
- Retail - Advertising
- Meeting Room - Conference
- Healthcare visual system
- Entertainment
- Government - Control Room

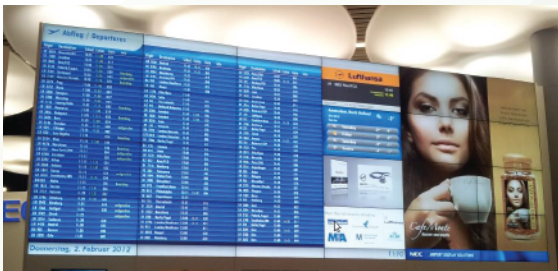

USB Extender 100 Meters Model : AHVE-USB10

FEATURES

- Support USB 2.0 protocol, transmission rate is up to 200Mbps
- Transmission distance is up to 100m / 328ft via a single CAT5e/6 cable
- Support one USB-B port input in the transmitter
- Supports two USB 2.0 ports output in receiver
- Support PoC function, it means that either transmitter or receiver is powered through 12V/1A power adapter, the other doesn't need power supply
- Simple plug and play, no drive and installation setting required
- Compact design for easy and flexible installation



PACKAGE CONTENT

- *USB 2.0 Extender (Transmitter) x 1
- *USB 2.0 Extender (Receiver) x 1
- *12V/1A Locking Power Adapter x1
- *USB cable (USB-B male head to USB-A male head, one meter) x 1

SPECIFICATION

USB protocol	USB 2.0
Transmission rate	Up to 200Mbps
Transmission distance	100M (328ft)
Input Connectors	1×USB [USB-B, female]-Tx 1×CAT [RJ45, female]-Rx
Output Connectors	1×CAT [RJ45, female]-Tx 2×USB [USB-A, female]-Rx

Operating Temperature	0°C ~ 40°C / 32°F ~ 104°F
Storage Temperature	-20°C ~ 60°C / -4°F ~ 140°F
Relative Humidity	20~90% RH (non-condensing)
Dimension	82mm (W)×49mm (D)×20mm (H)
Weight	100g
Power Supply	Input: AC100~240V 50/60Hz
Power consumption	Transmitter: 1.3W, Receiver: 2.3W
Power adapter	DC 12V/1A

CONNECTION DIAGRAM

