

# PRO - AV

## HI-END SERIES



### HIGH-END DIGITAL SIGNAGE SYSTEM



## Why choose ANGUSTOS Pro-AV ?

We can provide you the best solution that suits your TVs, interactive screens, meeting room high-end projector, digital signage and videowall system. We do not just simply sell the equipments but also a smart solution that is just as well designed as it is functional. Solutions that guarantee and define our brand:


- Ease-of-use
- Design
- Innovation
- Reliability
- Ease-of-installation.

To help you find the exact solution you need, Angustos has an extensive product range that is possible to compose a solution for nearly every Pro AV application. Our highly skill solution teams are happy to help you to quickly find the best solution for your installation, saving you the time and effort and hassle for complex system.



## ANGUSTOS PRO AV APPLICATIONS

- Media - Telecom - Broadcast
- Education - Training
- Manufacturing - Quality Control
- Retail - Advertising
- Meeting Room - Conference
- Healthcare visual system
- Entertainment
- Government - Control Room

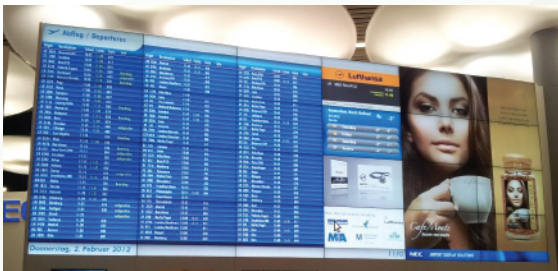

## USB Extender 50 Meters Model : AHVE-USB5

### FEATURES

- Supports USB 2.0 protocol, transmission rate up to 480Mbps
- Supports extend distance up to 50 meters /164ft via CAT 5e/6 cable  
(Note: The transmission distance can only up to 40 meters / 131.2ft for some USB 2.0 Hub)
- Supports one USB-B port input in transmitter
- Supports two USB 2.0 ports output in receiver
- Transmitter is powered supply by USB-B port's device
- Receiver is powered supply by connecting 5V/1A power adapter
- Simple plug and play, no drive and setting installation required
- Compact design for easy and flexible installation



### PACKAGE CONTENT

- \*USB 2.0 Extender (Transmitter) x 1
- \*USB 2.0 Extender (Receiver) x 1
- \*5V/1A Power Adapter x1
- \*USB cable (USB-B male head to USB-A male head, one meter )

### SPECIFICATION

<b>USB protocol</b>	USB 2.0
<b>Transmission rate</b>	Up to 480Mbps
<b>Transmission distance</b>	50M
<b>Input Connectors</b>	1×USB [USB-B, female]-Tx
	1×CAT [RJ45, female]-Rx
<b>Output Connectors</b>	1×CAT [RJ45, female]-Tx
	2×USB [USB-A, female]-Rx

<b>Operating Temperature</b>	0°C ~ 40°C / 32°F ~ 104°F
<b>Storage Temperature</b>	-20°C ~ 60°C / -4°F ~ 140°F
<b>Relative Humidity</b>	20~90% RH (non-condensing)
<b>Dimension</b>	82mm (W)×49mm (D)×20mm (H)
<b>Weight</b>	100g
<b>Power Supply</b>	Input: AC100~240V 50/60Hz
<b>Power consumption</b>	Transmitter: 0.7W, Receiver: 1W
<b>Power adapter</b>	DC 5V/1A

### CONNECTION DIAGRAM

