

PRO - AV

HI-END SERIES



HIGH-END DIGITAL SIGNAGE SYSTEM




Why choose ANGUSTOS Pro-AV ?

We can provide you the best solution that suits your TVs, interactive screens, meeting room high-end projector, digital signage and videowall system. We do not just simply sell the equipments but also a smart solution that is just as well designed as it is functional. Solutions that guarantee and define our brand:


- Ease-of-use
- Design
- Innovation
- Reliability
- Ease-of-installation.

To help you find the exact solution you need, Angustos has an extensive product range that is possible to compose a solution for nearly every Pro AV application. Our highly skill solution teams are happy to help you to quickly find the best solution for your installation, saving you the time and effort and hassle for complex system.

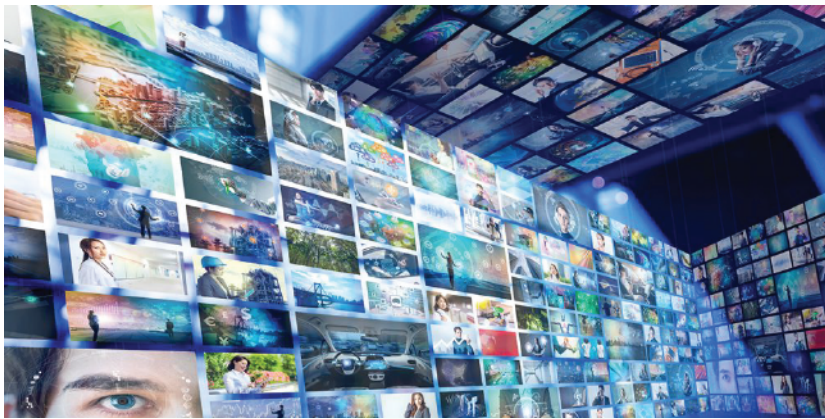

ANGUSTOS PRO AV APPLICATIONS

- Media - Telecom - Broadcast
- Education - Training
- Manufacturing - Quality Control
- Retail - Advertising
- Meeting Room - Conference
- Healthcare visual system
- Entertainment
- Government - Control Room

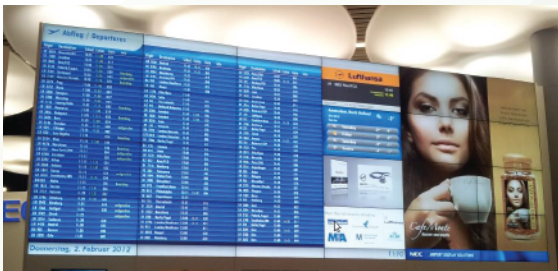

HDMI over Wireless 60G Extender 30 meters Model : AHVE-WH30K3

FEATURES

- HDMI 1.4b, HDCP 2.2 compliant
- Up to 4K@30Hz, 1080P@60Hz
- Up to 7.1 channels HD audio
- Uncompressed 4K Video & Audio
- Near zero latency
- Wireless extension up to 30 meters
- Simply plug-and-play for easy connection
- supports CEC



PACKAGE CONTENT

- * 1 × HDMI 4K over Wireless 60G Transmitter
- * 1 × HDMI 4K over Wireless 60G Receiver
- * 2 × 5V/1A USB adapter
- * 2 × USB to Micro-USB Cable

SPECIFICATION

Frequency Band Range	60 GHz	Operating Temperature	32 - 104°F / 0 - 40°C
Input resolution (Transmitter)	Up to 4K@30Hz	Storage Temperature	-4°F - 140°F / -20°C - 60°C
Output resolution (Receiver)	Up to 4K@30Hz	Relative Humidity	20 - 90% RH (no condensation)
Input Ports(Transmitter)	1x HDMI (Female type)	Dimension	90mm (W) × 56mm (D) × 17mm (H)
Output Ports (Receiver)	1x HDMI (Female type)	Weight	Transmitter:154g, Receiver: 155g
USB Connector (Transmitter, Receiver)	Micro USB	Power Supply	5V/1.5A DC
		Power consumption	Transmitter: 3W , Receiver: 3W

CONNECTION DIAGRAM

