

PRO - AV

NEW SOHO H-SERIES



HIGH-END DIGITAL SIGNAGE SYSTEM




Why choose ANGUSTOS Pro-AV ?

We can provide you the best solution that suits your TVs, interactive screens, meeting room high-end projector, digital signage and videowall system. We do not just simply sell the equipments but also a smart solution that is just as well designed as it is functional. Solutions that guarantee and define our brand:


- Ease-of-use
- Design
- Innovation
- Reliability
- Ease-of-installation.

To help you find the exact solution you need, Angustos has an extensive product range that is possible to compose a solution for nearly every Pro AV application. Our highly skill solution teams are happy to help you to quickly find the best solution for your installation, saving you the time and effort and hassle for complex system.

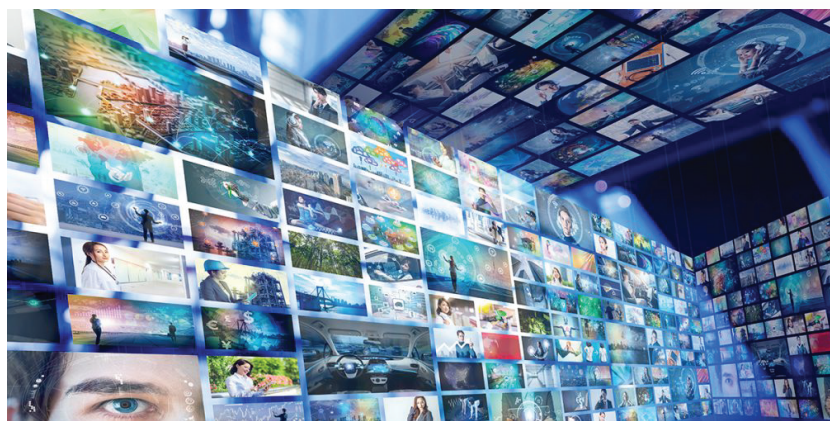

ANGUSTOS PRO AV APPLICATIONS

- Media - Telecom - Broadcast
- Education - Training
- Manufacturing - Quality Control
- Retail - Advertising
- Meeting Room - Conference
- Healthcare visual system
- Entertainment
- Government - Control Room

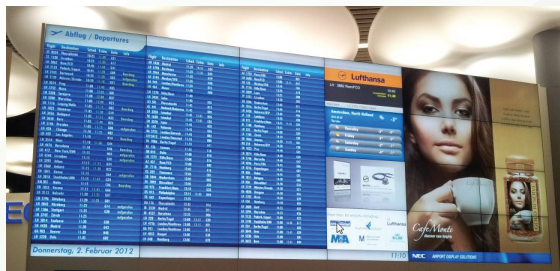

HDMI 8K SPLITTER

Model : AHVS-H102Q3


FEATURES

- HDMI 2.1, HDCP 2.3 standards, DVI 1.0
- Resolution 8K@60Hz 4:2:0.
- 40Gbps bandwidth
- VRR, FVA, ALLM supported
- Built-in Equalizer, Retiming and Driver
- Audio de-embedding function
- Compact design for easy and flexible installation
- HDR, HDR10, HDR10+, Dolby Vision, HLG pass through
- Advanced EDID management



PACKAGE

HDMI Splitter unit	x 1
Power Adapter	x 1



SPECIFICATION

Operating Temperature	0° to 40°C	Color Depth	8/10/12-bit
Operating Humidity	20 to 90%RH (no condensing)	Color Space	RGB, YCbCr 4:4:4
Video Input Connectors	1 x HDMI	Standard	HDMI 2.1/ HDCP 2.3
Video Output Connectors	2 x HDMI	Max Resolution	8K @ 60Hz
Data Rate	40 Gbps	Power Supply/Consumption	5 V/2A 4.15 W (Max)
Audio Format Support	LPCM 7.1CH, Dolby Digital	Dimension (W x D x H)	145 x 68 x 17 (mm)
	DTS-HD Master Audio, DSD	ESD / Impedance	±4 - 8kV / 100Ω

CONNECTION DIAGRAM

