

PRO - AV

NEW SOHO H-SERIES



HIGH-END DIGITAL SIGNAGE SYSTEM



Why choose ANGUSTOS Pro-AV ?

We can provide you the best solution that suits your TVs, interactive screens, meeting room high-end projector, digital signage and videowall system. We do not just simply sell the equipments but also a smart solution that is just as well designed as it is functional. Solutions that guarantee and define our brand:


- Ease-of-use
- Design
- Innovation
- Reliability
- Ease-of-installation.

To help you find the exact solution you need, Angustos has an extensive product range that is possible to compose a solution for nearly every Pro AV application. Our highly skill solution teams are happy to help you to quickly find the best solution for your installation, saving you the time and effort and hassle for complex system.



ANGUSTOS PRO AV APPLICATIONS

- Media - Telecom - Broadcast
- Education - Training
- Manufacturing - Quality Control
- Retail - Advertising
- Meeting Room - Conference
- Healthcare visual system
- Entertainment
- Government - Control Room

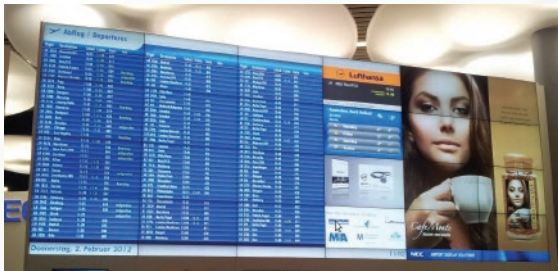

5x2 HDMI PRESENTATION SWITCH - with Multiview Model : AHVS-PS2570B

FEATURES

- HDMI 2.0, HDCP 2.2
- Multiview modes: 1:1, PIP, PBP, 4xWIN
- 18Gbps HDMI 2.0. 4K@60Hz 4:4:4
- Seamless switching
- Support 4x USB Host devices
- Support Mouse/Keyboard control
- Support OSD navigation
- Advanced EDID management supported
- USB Roaming for Windows, Linux, Mac.



PACKAGE

IR remote	x 1	HDMI matrix unit	x 1
Screw connector	x 1	12V Power Adaptor	x 1
User Manual	x 1	Mounting	x 1

SPECIFICATION

Operating Temperature	-10° to 50°C
Operating Humidity	5 to 90%RH (no condensing)
Input Connectors	4 x HDMI, 1 x USB-C 4 x USB-B (Host)
Output Connectors	2 x HDMI, 2 x USB-A
Data Rate / Pixel Clock	18 Gbps / 600MHz
Audio Format Support	LPCM, AC3, DD+, 7.1 Dolby Digital/Plus/EX Dolby True HD, DTS, DTS-EX DTS-96/24, DTS-HD, DSD
Resolution	4K @ 50/60Hz 1080p / 720p / 480p
EDID Control	Auto / Manual

Transmission Distance	10m with standard HDMI cable / 26AWG
Standard	HDMI 2.0b / HDCP 2.2
ESD / Impedance	±4 - 8kV / 100Ω
Down Scale	4K to 1080p
Color Depth	8 / 10 / 12 bit
Control	Button / RJ-45 / RS-232 IR Remote
Audio Output port	1 x 3.5mm Stereo 1 x Toslink digital
Power Supply/Consumption	12 V/3A 15 W (Max)
Dimension (L x W x H)	219 x 146 x 44.5 (mm)
Weight	~1.2kg

CONNECTION DIAGRAM

