

PRO - AV

NEW SOHO H-SERIES



HIGH-END DIGITAL SIGNAGE SYSTEM



Why choose ANGUSTOS Pro-AV ?

We can provide you the best solution that suits your TVs, interactive screens, meeting room high-end projector, digital signage and videowall system. We do not just simply sell the equipments but also a smart solution that is just as well designed as it is functional. Solutions that guarantee and define our brand:


- Ease-of-use
- Design
- Innovation
- Reliability
- Ease-of-installation.

To help you find the exact solution you need, Angustos has an extensive product range that is possible to compose a solution for nearly every Pro AV application. Our highly skill solution teams are happy to help you to quickly find the best solution for your installation, saving you the time and effort and hassle for complex system.



ANGUSTOS PRO AV APPLICATIONS

- Media - Telecom - Broadcast
- Education - Training
- Manufacturing - Quality Control
- Retail - Advertising
- Meeting Room - Conference
- Healthcare visual system
- Entertainment
- Government - Control Room

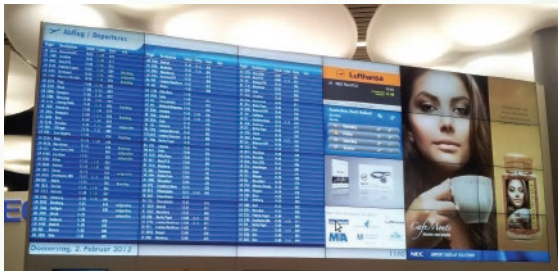

4K HDMI Extender 70 meters Model : KVE65R

FEATURES

- HDMI 1.4 / DVI 1.0 and HDCP 1.4 compliant
- Support 10.2 Gbps video bandwidth
- Support video resolution up to 4K@30Hz 4:4:4
- Distance up to 70m (1080p)/ 40m (4K@30)
- Copy EDID from receiver display/loop display
- Cascading via additional HDMI loop out port
- One way POC (Transmitter to receiver)
- One-way IR signal transmission



PACKAGE

Transmitter	x 1	IR Blaster / Receiver	x 1
Receiver	x 1	12V Power Adapter	x 1
User Manual	x 1		

SPECIFICATION

Standard	HDMI 1.4 / HDCP 1.4
Data Rate / Pixel Clock	10.2 Gbps / 600MHz
Resolution	4K @ 30Hz 4:4:4
Audio Support	LPCM 7.1CH, Dolby True HD
ESD / Impedance	±4 - 8kV / 100Ω
Transmitter	1 x HDMI input 1 x HDMI out, IR, CAT out
Receiver	1 x HDMI output IR, x CAT in
Control	IR in / IR out
HDR Support	HDR10

Transmission Distance	4K@30Hz : 40m 1080p : 70m (CAT6/6A)
Color Depth	8 bit
Power Supply/Consumption	12 V/1A 2 W (Max)
POC	Support (From Tx to Rx)
Dimension (L x W x H)	79 x 69 x 16.5 (mm)
Weight	~130gr
Operating Temperature	0° to 50°C
Storage Temperature	-20° to 60°C
Operating Humidity	0 to 90%RH (no condensing)
Storage Humidity	0 to 90%RH (no condensing)

CONNECTION DIAGRAM

