

PRO - AV

NEW SOHO H-SERIES



HIGH-END DIGITAL SIGNAGE SYSTEM



Why choose ANGUSTOS Pro-AV ?

We can provide you the best solution that suits your TVs, interactive screens, meeting room high-end projector, digital signage and videowall system. We do not just simply sell the equipments but also a smart solution that is just as well designed as it is functional. Solutions that guarantee and define our brand:


- Ease-of-use
- Design
- Innovation
- Reliability
- Ease-of-installation.

To help you find the exact solution you need, Angustos has an extensive product range that is possible to compose a solution for nearly every Pro AV application. Our highly skill solution teams are happy to help you to quickly find the best solution for your installation, saving you the time and effort and hassle for complex system.



ANGUSTOS PRO AV APPLICATIONS

- Media - Telecom - Broadcast
- Education - Training
- Manufacturing - Quality Control
- Retail - Advertising
- Meeting Room - Conference
- Healthcare visual system
- Entertainment
- Government - Control Room

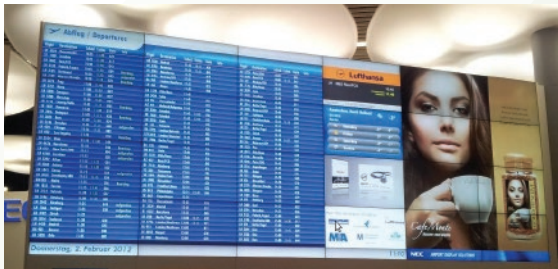

4x2 HDMI 2.0 Matrix Switcher Model : KVM0402K6

FEATURES

- HDMI 2.0, HDCP 2.2 / HDCP 1.4 and DVI 1.0 compliant
- Supports 4 HDMI inputs and 2 HDMI outputs
- Video resolution up to 4K2K@60Hz YCbCr 4:4:4
- Supports 18Gbps uncompressed bandwidth on all HDMI
- Supports Dolby Vision, HDR 10+, HLG and CEC function
- Supports extract HDMI input source device audio of OUT A or OUT B to optical and analog L/R output
- OUT A and OUT B support 4K to 1080P downscale function
- Supports ARC (Audio Return Channel) function
- Supports advanced EDID management including AUTO, COPY and STD
- Control is via front panel buttons and IR remote



PACKAGE

HDMI Matrix Switcher	x 1
Power Adapter	x 1
IR Remote	x 1

SPECIFICATION

Operating Temperature	0° to 40°C
Operating Humidity	5 to 90%RH (no condensing)
Video Input Connectors	4 x HDMI
Video Output Connectors	2 x HDMI
	1 x L/R audio out
	1 x OPTICAL audio out
Frequency Bandwidth	18Gbps
ESD / Impedance	±4 - 8kV / 100Ω
Video Resolution	4K2K@50/60Hz(YCbCr 4:4:4)
	4K2K@30Hz
	All HDMI 3D TV format

Color Depth	8-bit, 10-bit, 12-bit 1080P, 4K30Hz, 4K60Hz (YCbCr 4:2:0)
	8-bit [4K60Hz (YCbCr4:4:4)]
L/R Audio Formats	PCM2.0CH
Standard	HDMI 2.0/ HDCP 2.2 & 1.4
Optical Audio Formats	PCM2.0, Dolby Digital / Plus, DTS
Color Space	RGB, YCbCr4:4:4, YCbCr4:2:2,
Power Supply/Consumption	YCbCr 4:2:0
Dimension (L x W x H)	12 V/1A 3.8 W (Max)
Weight	251 mm X 105mm X 20mm
EDID Control	620g

