

# PRO - AV

## NEW SOHO H-SERIES



### HIGH-END DIGITAL SIGNAGE SYSTEM



## Why choose ANGUSTOS Pro-AV ?

We can provide you the best solution that suits your TVs, interactive screens, meeting room high-end projector, digital signage and videowall system. We do not just simply sell the equipments but also a smart solution that is just as well designed as it is functional. Solutions that guarantee and define our brand:


- Ease-of-use
- Design
- Innovation
- Reliability
- Ease-of-installation.

To help you find the exact solution you need, Angustos has an extensive product range that is possible to compose a solution for nearly every Pro AV application. Our highly skill solution teams are happy to help you to quickly find the best solution for your installation, saving you the time and effort and hassle for complex system.



## ANGUSTOS PRO AV APPLICATIONS

- Media - Telecom - Broadcast
- Education - Training
- Manufacturing - Quality Control
- Retail - Advertising
- Meeting Room - Conference
- Healthcare visual system
- Entertainment
- Government - Control Room

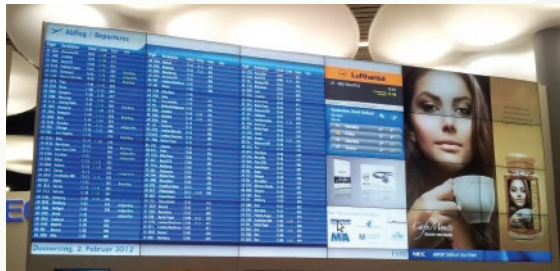

## HDMI 4K SWITCH WITH AUDIO EXTRACTOR

Model : KVS0401K6P

### FEATURES

- HDMI 2.0, DVI 1.0 standards.
- HDCP 2.2 and HDCP 1.4 compliant.
- Resolution 4K UHD @60 and 3D video.
- PCM 2.1/5.1/7.1. Dolby TrueHD.
- DTS-HD Master Audio up to 7.1CH.
- Digital and analog audio outputs.
- Smart EDID management.
- Input port auto/manual switching.
- Support Audio Return Channel (ARC).



### PACKAGE

HDMI Switch unit	x 1
Power Adapter	x 1
IR Remote	x 1



### SPECIFICATION

<b>Operating Temperature</b>	-10° to 60°C	<b>Transmission Distance</b>	5m with standard HDMI cable / 26AWG
<b>Operating Humidity</b>	5 to 90%RH	<b>Standard</b>	HDMI 2.0/ HDCP 2.0
<b>Video Input Connectors</b>	4 x HDMI	<b>Max Resolution</b>	3840x2160 @ 60Hz
<b>Video Output Connectors</b>	1 x HDMI	<b>Power Supply/Consumption</b>	5 V/1A - 3W (Max)
<b>Data Rate / Pixel Clock</b>	18 Gbps / 600MHz	<b>Dimension (L x W x H)</b>	180 x 85 x 11.6
<b>Audio Format Support</b>	DTS-HD, Dolby 5.1, DTS 5.1 Dolby True HD, PCM 5.1/7.1	<b>ESD / Impedance</b>	±4 - 8kV / 100Ω
<b>Control</b>	Panel button / IR Remote		

### CONNECTION DIAGRAM

