

# PRO - AV

## NEW SOHO H-SERIES



### HIGH-END DIGITAL SIGNAGE SYSTEM



## Why choose ANGUSTOS Pro-AV ?

We can provide you the best solution that suits your TVs, interactive screens, meeting room high-end projector, digital signage and videowall system. We do not just simply sell the equipments but also a smart solution that is just as well designed as it is functional. Solutions that guarantee and define our brand:


- Ease-of-use
- Design
- Innovation
- Reliability
- Ease-of-installation.

To help you find the exact solution you need, Angustos has an extensive product range that is possible to compose a solution for nearly every PRO AV application. Our highly skill solution teams are happy to help you to quickly find the best solution for your installation, saving you the time and effort and hassle for complex system.



## ANGUSTOS PRO AV APPLICATIONS

- Media - Telecom - Broadcast
- Education - Training
- Manufacturing - Quality Control
- Retail - Advertising
- Meeting Room - Conference
- Healthcare visual system
- Entertainment
- Government - Control Room

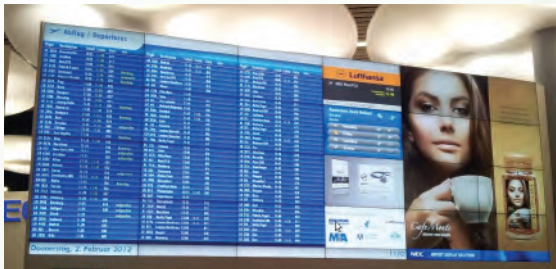

## 4K@60Hz 4x1 HDMI Switch with Multiview Model : KVSMQ0401K6

### FEATURES

- HDMI 2.0b, HDCP 2.2 and backward
- 18Gbps video bandwidth
- Resolutions support up to 4K@60Hz
- LPCM, AC3, DD+, DTS, DTS-HD
- Support 7.1 audio channel
- Seamless switching
- Up to 8 display modes
- Audio de-embedding analog & optical
- Volume control and independent audio
- EDID management
- Front panel buttons, IR remote, OSD
- RS-232 and Software control




### PACKAGE

IR remote	x 1	HDMI Switch unit	x 1
IR receiver	x 1	12V Power Adapter <small>(AC 100-240V 50/60Hz input)</small>	x 1
User Manual	x 1	Mounting Ear	x 1

### SPECIFICATION

<b>Operating Temperature</b>	-10° to 50°C
<b>Operating Humidity</b>	5 to 90%RH (no condensing)
<b>Video Input Connectors</b>	4 x HDMI
<b>Video Output Connectors</b>	1 x HDMI
<b>Data Rate / Pixel Clock</b>	18 Gbps / 600MHz
<b>Audio Output</b>	1 x L/R (RCA) 1 x Optical (S/PDIF)
<b>Audio Format Support</b>	PCM 2.0 / 5.1 / 7.1 Dolby Digital/Plus/EX Dolby True HD, DTS, DTS-EX
<b>Resolution</b>	4K @ 60Hz 4:4:4 RGB, 4:2:0, 4:2:2

<b>Transmission Distance</b>	10m with standard HDMI cable / 26AWG
<b>Standard</b>	HDMI 2.0b/ HDCP 2.2
<b>ESD / Impedance</b>	±4 - 8kV / 100Ω
<b>Down Scale</b>	4K to 1080p
<b>Color Depth</b>	8 bit / 10 bit (Opt)
<b>Control</b>	Button / RJ-45 / RS-232 IR Remote
<b>Power Supply/Consumption</b>	12 V/2.5A   10 W (Max)
<b>Dimension (L x W x H)</b>	105 x 220 x 44 (mm)
<b>Weight</b>	~650gr
<b>EDID Control</b>	Auto

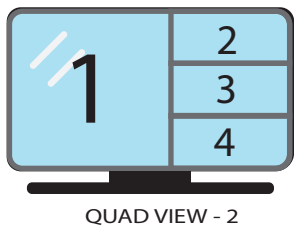

### CONNECTION DIAGRAM

