

PRO - AV

HI-END
SERIES



HIGH-END DIGITAL SIGNAGE SYSTEM



Why choose ANGUSTOS Pro-AV ?

We can provide you the best solution that suits your TVs, interactive screens, meeting room high-end projector, digital signage and videowall system. We do not just simply sell the equipments but also a smart solution that is just as well designed as it is functional. Solutions that guarantee and define our brand:


- Ease-of-use
- Design
- Innovation
- Reliability
- Ease-of-installation.

To help you find the exact solution you need, Angustos has an extensive product range that is possible to compose a solution for nearly every Pro AV application. Our highly skill solution teams are happy to help you to quickly find the best solution for your installation, saving you the time and effort and hassle for complex system.



ANGUSTOS PRO AV APPLICATIONS

- Media - Telecom - Broadcast
- Education - Training
- Manufacturing - Quality Control
- Retail - Advertising
- Meeting Room - Conference
- Healthcare visual system
- Entertainment
- Government - Control Room

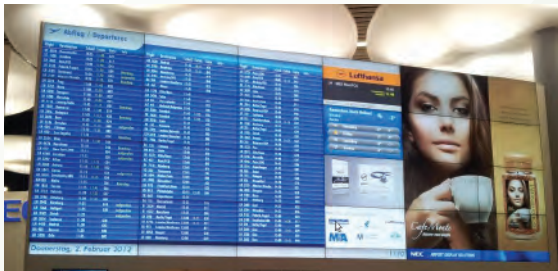

HDMI MATRIX SWITCH Seamless 9 x 9 - Multi-View support Model : KVSMW0909K3

FEATURES

- Matrix 9 sources to any 9 displays
- Seamless video switching
- 3x3 Multi-View / Video Wall
- Resolution up to HDMI 1.4 - 4K@30Hz
- Support Balanced Audio Extraction
- Built-in advanced EDID management
- Support front panel Button, IR, RS-232 and TCP/IP Control
- HDCP 2.2/1.4 Compliant
- Firmware update with Micro USB




SPECIFICATION

Operating Temperature	-5° to 50°C
Operating Humidity	0 to 90% RH
Video Input Connectors	9 x HDMI
Video Output Connectors	9 x HDMI
Data Rate / Pixel Clock	10.2 Gbps
HDMI Version	HDMI 1.4 / DVI
Control	Button / IR / RS-232 1 x RJ-45 (TCP/IP) 1 x IR EXT (3.5mm)
Loop Out	1 x HDMI Loop Out port
Audio	PCM, Dolby 5.1/7.1

Standard	HDCP 2.0
Input / Output Resolution	3840x2160 @ 30Hz
Color Space	RGB, YCbCr 4:4:4 YUV 4:2:0
Color Depth	8 bit
Power Supply	AC 100 - 240V 50/60Hz DC 12V/3A
IR Level	12V p-p / 38 KHz
Power Consumption	26 W (max)
Dimension	482 x 273 x 44 mm


CONNECTION DIAGRAM

INPUT




HDMI
HDMI
HDMI
HDMI
HDMI
HDMI
HDMI
HDMI
HDMI

CONTROL



OUTPUT

VIDEO WALL (3X3)

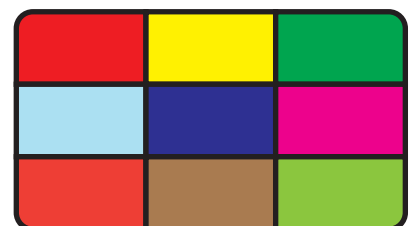

FLEXIBLE VIDEO WALL / MULTI-VIEW MODE

