

High-End

Video Wall Controller



MULTIPLE LAYERS FPGA VIDEOWALL CONTROLLER



Hardware Based Design


High performance video processing equipment with hardware architecture design.

- ★ No more computer high-end specification.
- ★ No more high-end Graphic Processing Unit (GPU Card).
- ★ No more licenses.
- ★ No more blue-screen OS crash.
- ★ No more viruses and black screen.
- ★ No more ransomwares, lost data.
- ★ Support up to 92 input x 72 output or 88 input x 60 output

FPGA Dedicated Chipset

Dedicated Field Programmable Gate Array (FPGA) chipset is a combination of processing unit that dedicated in video processing. This eliminated the limitation of a CPU or a GPU from conventional Software or PC controller.

Without the use of PCI - Express card, the unit can work flawlessly when adding or editing the total layout of the videowall set up. As each of the FPGA chip is working independently, user can replace or add new input / output card without turning off the whole chassis.

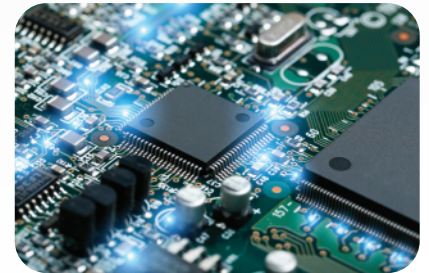

Module design with Hot Swap

Multiple form of connections for client to custom fit their system. Client can now combine HDMI - DVI - VGA - HDBaseT - IP Streaming in one total solution, maximizing system integration.

Reduce the total cost of investment in both pre & post phase of expansion. Chassis also support control multiple videowalls, further simplify the complexity of connections and management.

Features

● High-end 4 Layers MPiP™ - Cross Screen

Support up to 4 Layers Matrix Picture in Picture (MPiP™) in each screen

● Easy control with Drag & Drop

Customize complex layout with simple Click - Drag - Drop

● High-end Video Wall Control

Support Overlap, Roaming, Stretching, Zoom in / out.

● Front Panel Touch Screen

Control scene mode, save / recall profile, IP setting with just a touch

● IP Camera Direct Stream (iDirect Stream™)

IP input Card can support streaming video feed direct from IP CCTV Cameras.

● Background Image - Scrolling Text - Scheduling

Support Static Background Image and Scrolling Text for Bank and Stock house Video Wall
Support scene mode Scheduling - Cycle for advertising - digital signage Video Wall



VIDEO WALL CONTROLLER

24 x 20 Cross Screens Video Wall

Features

- Pure Hardware Structure - FPGA
- Modular Design - Hot swap
- Seamless Switching - Auto EDID
- Bezel Compensation with Scaler
- Scrolling Text (Optional)
- Character Superimposition
- Ultra HD Background Image
- Multiple video wall management
- Signal preview (Optional)
- Support Redundant Power Supply



SPECIFICATION


| | |
|-----------------------|------------------------------------|
| Chassis size | 4U 440 x 350 x 178 mm |
| Max. Data Rate | 15.2 Gbps (3.8Gbps per Lane) |
| Input Interface Port | 4 - 24 |
| Output Interface Port | 4 - 20 |
| Interface Support | VGA / CVBS / YPbPr / SDI / IP |
| | HDBaseT / DVI / DP / HDMI |
| Control | IP / RS-232 / Touchscreen (Option) |

| | |
|-------------------|---------------------------------|
| HDCP | Support 1.3 / 1.4 / 2.2 |
| EDID | Auto - Program |
| Resolution Input | 1920 x 1200 @ 60 Hz -8 Bit RGBA |
| | 4092 x 2160 @ 30Hz-8 Bit RGBA |
| Resolution Output | 1920 x 1200 @ 60 Hz-8 Bit RGBA |
| Multiple Layers | Support - 4 Layers MPiP™ |
| Power Supply | 100 ~ 240V, 50-60 Hz |
| Temp / Humid | -20°C ~ + 70°C / 10% ~ 90% |

HYBRID I/O SLOT

Advance FPGA chip allow Angustos Video Wall Controller chassis to set up flexible input / output slot. Hybrid I/O Slot can be both Input or Output slot

- INPUT PORT
- OUTPUT PORT
- HYBRID I/O PORT
- POWER MODULE
- ETHERNET PORT
- RS-232 PORT

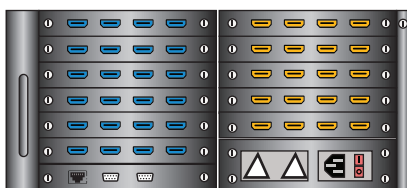

| | |
|-------------|-----------|
| ACVW4-2420 | MAX INPUT |
| INPUT PORT | 24 |
| OUTPUT PORT | 20 |

INPUT

CONNECTION DIAGRAM

OUTPUT

