

# High-End

## Video Wall Controller



### MULTIPLE LAYERS FPGA VIDEOWALL CONTROLLER



## Hardware Based Design


High performance video processing equipment with hardware architecture design.

- ★ No more computer high-end specification.
- ★ No more high-end Graphic Processing Unit (GPU Card).
- ★ No more licenses.
- ★ No more blue-screen OS crash.
- ★ No more viruses and black screen.
- ★ No more ransomwares, lost data.
- ★ Support up to 152 input x 144 output (20U Chassis)

## FPGA Dedicated Chipset

Dedicated Field Programmable Gate Array (FPGA) chipset is a combination of processing unit that dedicated in video processing. This eliminated the limitation of a CPU or a GPU from conventional Software or PC controller.

Without the use of PCI - Express card, the unit can work flawlessly when adding or editing the total layout of the videowall set up. As each of the FPGA chip is working independently, user can replace or add new input / output card without turning off the whole chassis.

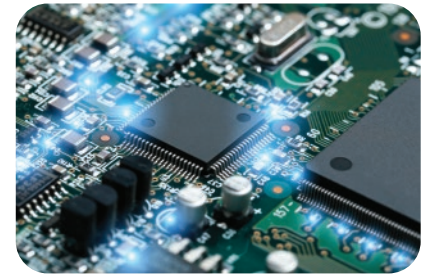

## Module design with Hot Swap

Multiple form of connections for client to custom fit their system. Client can now combine HDMI - DVI - VGA - HDBaseT - IP Streaming in one total solution, maximizing system intergration.

Reduce the total cost of investment in both pre & post phase of expansion. Chassis also support control multiple videowalls, further simplify the complexity of connections and management.



## Features

### ● High-end Multi Layers MPiP™ - Cross Screen

Support up to 2 Layers Matrix Picture in Picture (MPiP™) in each screen

### ● Easy control with Drag & Drop

Customize complex layout with simple Click - Drag - Drop

### ● High-end Video Wall Control

Support Overlap, Roaming, Stretching, Zoom in / out.

### ● Front Panel Touch Screen


Control scene mode, save / recall profile, IP setting with just a touch

### ● IP Camera Direct Stream (iDirect Stream™)

IP input Card can support streaming video feed direct from IP CCTV Cameras.

### ● Background Image - Scrolling Text - Scheduling

Support Static Background Image and Scrolling Text for Bank and Stock house Video Wall  
Support scene mode Scheduling - Cycle for advertising - digital signage Video Wall

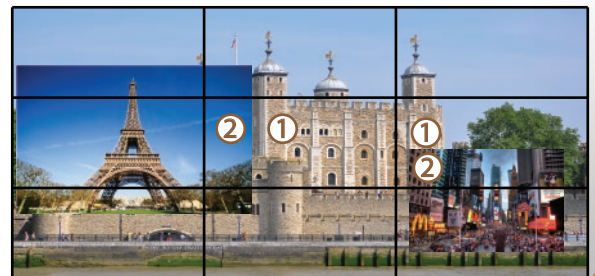

## VIDEO WALL CONTROLLER

### 36 x 36 / 48 x 24 Cross Screens Video Wall

#### Features

- Pure Hardware Structure - FPGA
- Modular Design
- Seamless Switching
- Bezel Compensation
- Scrolling Text
- Character Superimposition
- Ultra HD Background Image
- Multiple video wall management
- Signal preview(Optional)
- Support Redundant Power Supply




#### SPECIFICATION

Chassis size	6.5U   440 x 400 x 290 mm	Resolution Input	1920 x 1200 @ 60 Hz
Input Interface Port	4 - 48		4092 x 2160 @ 30Hz
Output Interface Port	4 - 36	Resolution Output	1920 x 1200 @ 60 Hz
Interface Support	VGA / CVBS / YPbPR / SDI / IP	Multiple Layers	Support - 2
	HDBaseT / DVI / DP / HDMI	Power Supply	100 ~ 240V, 50-60 Hz
Control	IP / RS-232 / Touchscreen (Option)	Temp / Humid	-20°C ~ + 70°C / 10% ~ 90%

#### HYBRID I/O SLOT

Advance FPGA chip allow Angustos Video Wall Controller chassis to set up flexible input / output slot. Hybrid I/O Slot can be both Input or Output slot

-  INPUT PORT
-  OUTPUT PORT
-  HYBRID I/O PORT
-  POWER MODULE
-  ETHERNET PORT
-  RS-232 PORT

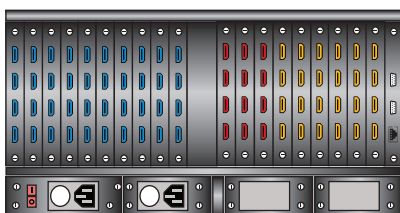

ACVW4-3636	MAX INPUT	MAX OUTPUT
INPUT PORT	48	36
OUTPUT PORT	24	36

#### INPUT

#### CONNECTION DIAGRAM

#### OUTPUT

