

# High-End

## Video Wall Controller



### ACVM FPGA VIDEOWALL CONTROLLER



## Hardware Based Design

High performance video processing equipment with hardware architecture design.


- ★ No more computer high-end specification.
- ★ No more high-end Graphic Processing Unit (GPU Card).
- ★ No more licenses.
- ★ No more blue-screen OS crash.
- ★ No more viruses and black screen.
- ★ No more ransomwares, lost data.



## FPGA Dedicated Chipset

Dedicated Field Programmable Gate Array (FPGA) chipset is a combination of processing unit that dedicated in video processing. This eliminated the limitation of a CPU or a GPU from conventional Software or PC controller. Support 24/7 working with over 50,000 hours MTBF.


Without the use of PCI - Express card, the unit can work flawlessly when adding or editing the total layout of the videowall set up. As each of the FPGA chip is working independently, user can replace or add new input / output card without turning off the whole chassis.

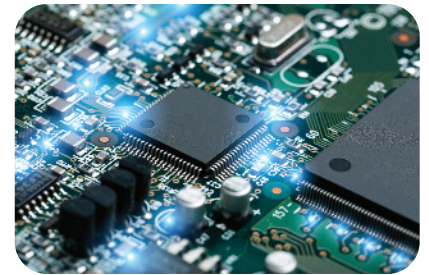

## Module design with Hot Swap

Multiple form of connections for client to custom fit their system.  
Client can now combine HDMI - DVI in one total solution, maximizing system integration for IT rack (19").

Reduce the total cost of investment in both pre & post phase of expansion. Chassis also support control multiple videowalls, further simplify the complexity of connections and management.

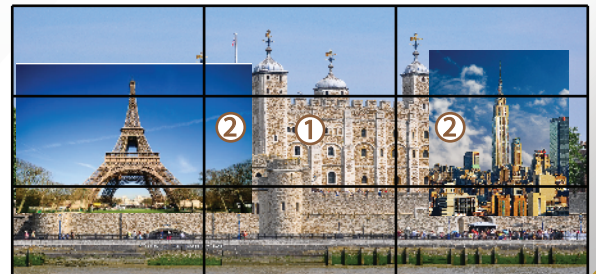

## Features

- **High-end 2 Layers MPiP™ - Cross Screen**  
Support up to 2 Layers Matrix Picture in Picture (MPiP™) in each screen
- **Easy control with Drag & Drop**  
Customize complex layout with simple Click - Drag - Drop
- **High-end Video Wall Control**  
Support Overlap, Rooming, Stretching, Zoom in / out.
- **Front Panel Touch Screen**  
Control scene mode, save / recall profile (up to 30), IP setting with just a touch
- **IP Camera Direct Stream (iDirect Stream™)**  
IP input Card can support streaming video feed direct from IP CCTV Cameras.
- **Background Image - Scrolling Text - Scheduling**  
Support Static Background Image and Scrolling Text for Bank and Stock house Video Wall  
Support scene mode Scheduling - Cycle for advertising - digital signage Video Wall

## VIDEO WALL CONTROLLER - ACVM 04 x 04 Cross Screens Video Wall

### FEATURES

- Pure Hardware Structure - FPGA
- Modular Design - Hot swap
- Seamless Switching - Auto EDID - 5ms
- Bezel Compensation with Scaler
- Multiple users / rights management
- Character Superimposition, Scrolling Text (opt)
- Multiple video wall management
- Signal preview (opt)
- Mobile apps Support
- RS-232 in / out support
- Easy manage with TCP/IP
- Independent 2 Layers signal



### SPECIFICATION

Chassis size	1U	EDID	Auto - Program
Max. Data Rate	15.2 Gbps (3.8Gbps per Lane)	Resolution Input	1920 x 1080 @ 60 Hz -8 Bit RGBA 1920 x 1200 @ 60 Hz -8 Bit RGBA
Input Interface Port	4	Resolution Output	1920 x 1080 @ 60 Hz-8 Bit RGBA 1920 x 1200 @ 60 Hz-8 Bit RGBA
Output Interface Port	4	Multiple Layers	Support - 2 Layers MPiP™
Interface Support	HDMI (INPUT) HDMI/DVI (OUTPUT)	Power Supply	100 ~ 240V, 50-60 Hz
Control	IP / RS-232	Temp / Humid	-20°C ~ + 70°C / 10% ~ 90%
HDCP	Support 1.3 / 1.4 / 2.2		

