

PRO - AV

HI-END SERIES



HIGH-END DIGITAL SIGNAGE SYSTEM



Why choose ANGUSTOS Pro-AV ?

We can provide you the best solution that suits your TVs, interactive screens, meeting room high-end projector, digital signage and videowall system. We do not just simply sell the equipments but also a smart solution that is just as well designed as it is functional. Solutions that guarantee and define our brand:


- Ease-of-use
- Design
- Innovation
- Reliability
- Ease-of-installation.

To help you find the exact solution you need, Angustos has an extensive product range that is possible to compose a solution for nearly every Pro AV application. Our highly skill solution teams are happy to help you to quickly find the best solution for your installation, saving you the time and effort and hassle for complex system.



ANGUSTOS PRO AV APPLICATIONS

- Media - Telecom - Broadcast
- Education - Training
- Manufacturing - Quality Control
- Retail - Advertising
- Meeting Room - Conference
- Healthcare visual system
- Entertainment
- Government - Control Room

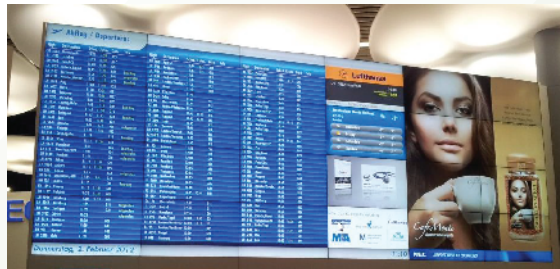

HDMI KVM SWITCHH 1 X2 Model : KM82HK3

Features

- HDMI input maximum support 4K@30Hz RGB4:4:4, 8 Bit.
- Supports pass-through of audio formats including LPCM 2.0/5.1/7.1 Bitstream, and HD Bitstream
- Support WindowsXP/WIN7/WIN10/Apple/Ubuntu,etc
- Support auto switching (monitor the devices in a specified time interval)
- Support keyboard's hot keys to control the KVM switch
- Available to use keyboard and mouse without any delay after switching the host devices.
- Power can be supplied by the USB Type B port
- Support hot plug, connect or disconnect devices to the KVM switch in any time



Package content

HDMI KVM SWITCH	x 1
1 x 5V/1A DC Power Supply	x 1
2x Mounting ear	x 1

SPECIFICATION

Operating Temperature	-10° to 45°C
Operating Humidity	5 to 90%RH
Video Input Connectors	2 x HDMI Type A
Video Output Connectors	1 x HDMI Type A
USB/KVM Port:	2 x USB Type-B (Host) 4x USB Type-A

Casing Materia:	Iron
Standard	HDCP 1.4 / HDCP 2.2
Max Resolution	3840x2160 @ 30Hz
Power Supply /Consumption	5 volt / 2A
Dimension (L x W x H)	120.3*62.5*22mm
Shipping weight :	0.6kg

CONNECTION DIAGRAM

