

High-End

Video Wall Controller



MULTIPLE LAYERS FPGA VIDEOWALL CONTROLLER



Hardware Based Design


High performance video processing equipment with hardware architecture design.

- ★ No more computer high-end specification.
- ★ No more high-end Graphic Processing Unit (GPU Card).
- ★ No more licenses.
- ★ No more blue-screen OS crash.
- ★ No more viruses and black screen.
- ★ No more ransomwares, lost data.
- ★ Support up to 92 input x 72 output or 88 input x 60 output

FPGA Dedicated Chipset

Dedicated Field Programmable Gate Array (FPGA) chipset is a combination of processing unit that dedicated in video processing. This eliminated the limitation of a CPU or a GPU from conventional Software or PC controller. Support 24/7 working with over 50,000 hours MTBF.

Without the use of PCI - Express card, the unit can work flawlessly when adding or editing the total layout of the videowall set up. As each of the FPGA chip is working independently, user can replace or add new input / output card without turning off the whole chassis.

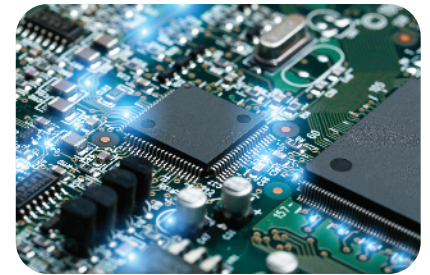

Module design with Hot Swap

Multiple form of connections for client to custom fit their system. Client can now combine HDMI - DVI - VGA - HDBaseT - IP Streaming in one total solution, maximizing system integration for IT Rack (19").

Reduce the total cost of investment in both pre & post phase of expansion. Chassis also support control multiple videowalls, further simplify the complexity of connections and management.

Features

● High-end 4 Layers MPiP™ - Cross Screen

Support up to 4 Layers Matrix Picture in Picture (MPiP™) in each screen

● Easy control with Drag & Drop

Customize complex layout with simple Click - Drag - Drop

● High-end Video Wall Control

Support Overlap, Roaming, Stretching, Zoom in / out.

● Front Panel Touch Screen

Control scene mode, save / recall profile (up to 30), IP setting with just a touch

● IP Camera Direct Stream (iDirect Stream™)

IP input Card can support streaming video feed direct from IP CCTV Cameras.

● Background Image - Scrolling Text - Scheduling

Support Static Background Image and Scrolling Text for Bank and Stock house Video Wall
Support scene mode Scheduling - Cycle for advertising - digital signage Video Wall



VIDEO WALL CONTROLLER

16 x 09 / 20 x 08 Cross Screens Video Wall

FEATURES

- Pure Hardware Structure - FPGA
- Modular Design - Hot swap
- Seamless Switching - Auto EDID - 5ms
- Bezel Compensation with Scaler
- Multiple users / rights management
- Character Superimposition, Scrolling Text (opt)
- Ultra HD Background Image (opt)
- Multiple video wall management - up to 4
- Signal preview (opt)
- Support Redundant Power Supply (opt)



*All Pictures shown are for illustration purpose only. Actual product may vary due to product enhancement. ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

SPECIFICATION


Chassis size	2.5U 440 x 350 x 112 mm
Max. Data Rate	15.2 Gbps (3.8Gbps per Lane)
Input Interface Port	4 - 20
Output Interface Port	4 - 09
Interface Support	VGA / CVBS / YPbPR / SDI / IP
(Input/Output)	HDBaseT / DVI / DP / HDMI / Fiber
Control	Over IP / RS-232 / Touchscreen (Option)
HDCP	Support 1.3 / 1.4 / 2.2

EDID	Auto - Program
Resolution Input / Output	1280 x 720 @ 120 Hz-8 Bit RGBA
	1600 x 900 @ 60 Hz-8 Bit RGBA
	1920 x 1080 @ 60 Hz-8 Bit RGBA
	1920 x 1200 @ 60 Hz -8 Bit RGBA
	4092 x 2160 @ 30Hz-8 Bit RGBA
Multiple Layers	Support - 4 Layers MPiP™
Power Supply	100 ~ 240V, 50-60 Hz
Temp / Humid	-20°C ~ + 70°C / 10% ~ 90%

HYBRID I/O SLOT

Advance FPGA chip allow Angustos Video Wall Controller chassis to set up flexible input / output slot. Hybrid I/O Slot can be both Input or Output slot

- INPUT PORT
- OUTPUT PORT
- HYBRID I/O PORT
- POWER MODULE
- ETHERNET PORT (Over IP Control)
- RS-232 PORT

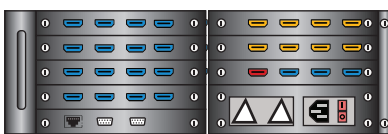

ACVW4-1609DD : 2.5U chassis

ACVW4-1609	MAX INPUT	MAX OUTPUT
INPUT PORT	20	16
OUTPUT PORT	08	09

INPUT

CONNECTION DIAGRAM

OUTPUT

