

High-End

Video Wall Controller



MULTIPLE LAYERS FPGA VIDEOWALL CONTROLLER



Hardware Based Design


High performance video processing equipment with hardware architecture design.

- ★ No more computer high-end specification.
- ★ No more high-end Graphic Processing Unit (GPU Card).
- ★ No more licenses.
- ★ No more blue-screen OS crash.
- ★ No more viruses and black screen.
- ★ No more ransomwares, lost data.
- ★ Support up to 92 input x 72 output or 88 input x 60 output

FPGA Dedicated Chipset

Dedicated Field Programmable Gate Array (FPGA) chipset is a combination of processing unit that dedicated in video processing. This eliminated the limitation of a CPU or a GPU from conventional Software or PC controller. Support 24/7 working with over 50,000 hours MTBF.

Without the use of PCI - Express card, the unit can work flawlessly when adding or editing the total layout of the videowall set up. As each of the FPGA chip is working independently, user can replace or add new input / output card without turning off the whole chassis

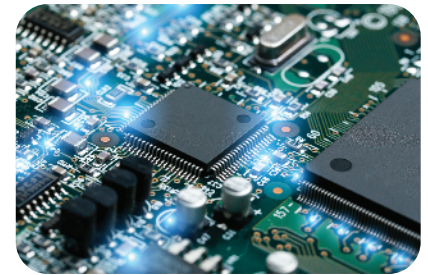

Module design with Hot Swap

Multiple form of connections for client to custom fit their system. Client can now combine HDMI - DVI - VGA - HDBaseT - IP Streaming in one total solution, maximizing system integration for IT Rack (19").

Reduce the total cost of investment in both pre & post phase of expansion. Chassis also support control multiple videowalls, further simplify the complexity of connections and management.

Features

- **High-end 4 Layers MPiP™ - Cross Screen**
Support up to 4 Layers Matrix Picture in Picture (MPiP™) in each screen
- **Easy control with Drag & Drop**
Customize complex layout with simple Click - Drag - Drop
- **High-end Video Wall Control**
Support Overlap, Roaming, Stretching, Zoom in / out.
- **Front Panel Touch Screen**
Control scene mode, save / recall profile (up to 30), IP setting with just a touch
- **IP Camera Direct Stream (iDirect Stream™)**
IP input Card can support streaming video feed direct from IP CCTV Cameras.
- **Background Image - Scrolling Text - Scheduling**
Support Static Background Image and Scrolling Text for Bank and Stock house Video Wall
Support scene mode Scheduling - Cycle for advertising - digital signage Video Wall



VIDEO WALL CONTROLLER

24 x 20 Cross Screens Video Wall

FEATURES

- Pure Hardware Structure - FPGA
- Modular Design - Hot swap
- Seamless Switching - Auto EDID - 5ms
- Bezel Compensation with Scaler
- Multiple users / rights management
- Character Superimposition, Scrolling Text (opt)
- Ultra HD Background Image (opt)
- Multiple video wall management - up to 4
- Signal preview (opt)
- Support Redundant Power Supply (opt)




SPECIFICATION

		EDID	Auto - Program
Chassis size	4U 440 x 350 x 178 mm	Resolution Input / Output	1280 x 720 @ 120 Hz-8 Bit RGBA
Max. Data Rate	15.2 Gbps (3.8Gbps per Lane)		1600 x 900 @ 60 Hz-8 Bit RGBA
Input Interface Port	4 - 24		1920 x 1080 @ 60 Hz-8 Bit RGBA
Output Interface Port	4 - 20		1920 x 1200 @ 60 Hz -8 Bit RGBA
Interface Support	VGA / CVBS / YPbPR / SDI / IP		4092 x 2160 @ 30Hz-8 Bit RGBA
(Input/Output)	HDBaseT / DVI / DP / HDMI / Fiber	Multiple Layers	Support - 4 Layers MPiP™
Control	Over IP / RS-232 / Touchscreen (Option)	Power Supply	100 ~ 240V, 50-60 Hz
HDCP	Support 1.3 / 1.4 / 2.2	Temp / Humid	-20°C ~ + 70°C / 10% ~ 90%

HYBRID I/O SLOT

Advance FPGA chip allow Angustos Video Wall Controller chassis to set up flexible input / output slot. Hybrid I/O Slot can be both Input or Output slot

-  INPUT PORT
-  OUTPUT PORT
-  HYBRID I/O PORT
-  POWER MODULE
-  ETHERNET PORT (Over IP Control)
-  RS-232 PORT

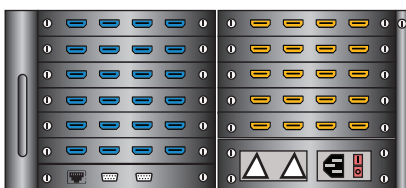

ACVW4-2420	MAX INPUT
INPUT PORT	24
OUTPUT PORT	20

