

# High-End

## Video Wall Controller



### MULTIPLE LAYERS FPGA VIDEOWALL CONTROLLER



## Hardware Based Design


High performance video processing equipment with hardware architecture design.

- ★ No more computer high-end specification.
- ★ No more high-end Graphic Processing Unit (GPU Card).
- ★ No more licenses.
- ★ No more blue-screen OS crash.
- ★ No more viruses and black screen.
- ★ No more ransomwares, lost data.
- ★ Support up to 152 input x 144 output (20U Chassis)

## FPGA Dedicated Chipset

Dedicated Field Programmable Gate Array (FPGA) chipset is a combination of processing unit that dedicated in video processing. This eliminated the limitation of a CPU or a GPU from conventional Software or PC controller.

Without the use of PCI - Express card, the unit can work flawlessly when adding or editing the total layout of the videowall set up. As each of the FPGA chip is working independently, user can replace or add new input / output card without turning off the whole chassis.

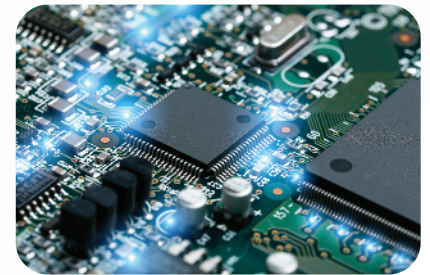


## Module design with Hot Swap

Multiple form of connections for client to custom fit their system. Client can now combine HDMI - DVI - VGA - HDBaseT - IP Streaming in one total solution, maximizing system integration.

Reduce the total cost of investment in both pre & post phase of expansion. Chassis also support control multiple videowalls, further simplify the complexity of connections and management.

## Features

- **High-end Multi Layers MPiP™ - Cross Screen**  
Support up to 4 Layers Matrix Picture in Picture (MPiP™) in each screen
- **Easy control with Drag & Drop**  
Customize complex layout with simple Click - Drag - Drop
- **High-end Video Wall Control**  
Support Overlap, Roaming, Stretching, Zoom in / out.
- **Front Panel Touch Screen**  
Control scene mode, save / recall profile, IP setting with just a touch
- **IP Camera Direct Stream (iDirect Stream™)**  
IP input Card can support streaming video feed direct from IP CCTV Cameras.
- **Background Image - Scrolling Text - Scheduling**  
Support Static Background Image and Scrolling Text for Bank and Stock house Video Wall  
Support scene mode Scheduling - Cycle for advertising - digital signage Video Wall

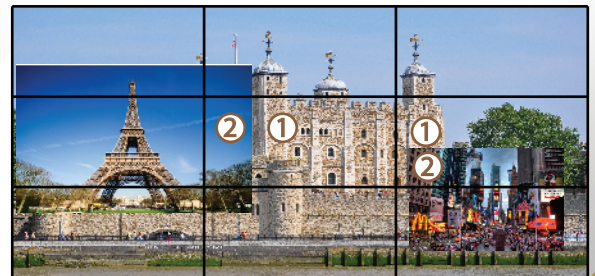


# VIDEO WALL PREVIEW CARD

## Multi Layers HDMI Input Card

### Features

- ASIC video chipset
- Modular Design - Hot swap
- Preview up to 64 channel
- Optimize 16 channel full screen
- MPiP™ - Multiple Layers
- Flexible display modes
- Dedicate Board IP for preview card
- Sub Channel 4 channel for each Scene setup

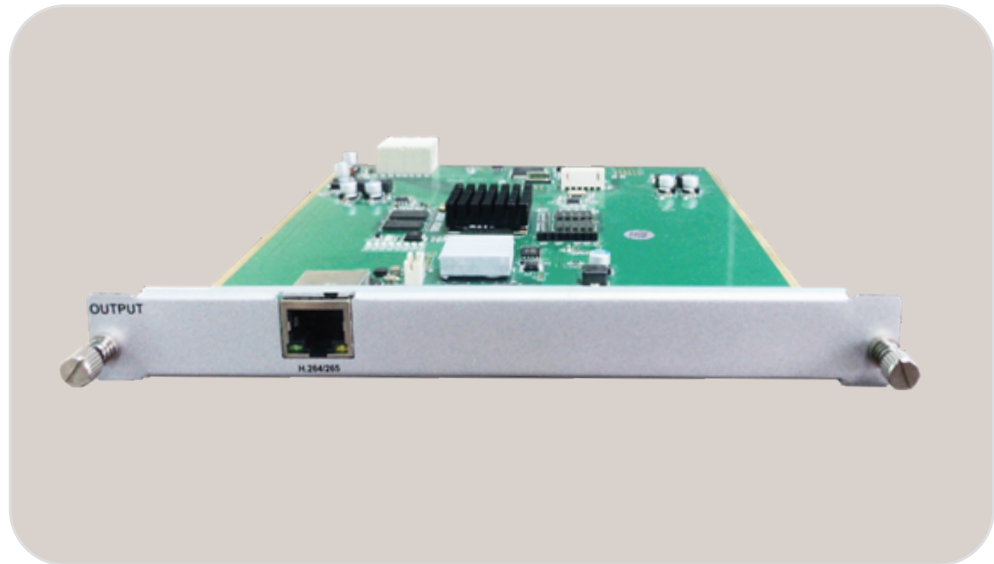

### SPECIFICATION

Protocol	H.264 / H.265
Input Card Interface	RJ-45 port
Resolution Support	1920 x 1200 @ 60Hz (Max)
Pixel Clock	Depend on Input card
Compliance	Depend on Input card
Control	Internal Bus with Chassis ASIC
Data Rate	10.2 Gbps (3.4Gbps per lane)
Clock Jitter	<0.15 Tbit
Rise time	<0.3Tbit (20%-80%)
Fall time	<0.3Tbit (20%-80%)
Max Delay	5 nano Second (nS) ±1nS
Signal Strength	Depend on Input card
Signal Level	Depend on Input card
Impedance	Depend on Input card
EDID	Default EDID - EDID Programming
Maximum DC bias	Depend on Input card
Signal Level	Depend on Input card
HDCP	Depend on Input card

Channel Sources	Support up to 64 channel
Optimized	Best for 16 channel full-screen
Signal Echo	Support
Input Source Management	Support
Input Source Preview	Support
Scene Management	Support