

# PRO - AV

## NEW SOHO H-SERIES



### HIGH-END DIGITAL SIGNAGE SYSTEM



## Why choose ANGUSTOS Pro-AV ?

We can provide you the best solution that suits your TVs, interactive screens, meeting room high-end projector, digital signage and videowall system. We do not just simply sell the equipments but also a smart solution that is just as well designed as it is functional. Solutions that guarantee and define our brand:


- Ease-of-use
- Design
- Innovation
- Reliability
- Ease-of-installation.

To help you find the exact solution you need, Angustos has an extensive product range that is possible to compose a solution for nearly every Pro AV application. Our highly skill solution teams are happy to help you to quickly find the best solution for your installation, saving you the time and effort and hassle for complex system.



## ANGUSTOS PRO AV APPLICATIONS

- Media - Telecom - Broadcast
- Education - Training
- Manufacturing - Quality Control
- Retail - Advertising
- Meeting Room - Conference
- Healthcare visual system
- Entertainment
- Government - Control Room

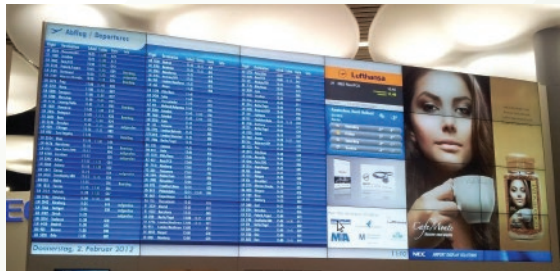

## HDMI 4K SPLITTER

### Model : KVS108K3

#### FEATURES

- HDCP 1.4 protocol compliant.
- 3D HDMI 1.4a video format support.
- 3D video support including Frame packing for all 3D formats up to a 297MHz TMDS clock.
- Resolutions up to 4K x 2K@30Hz, 1080P@120Hz, 1080P 3D@60Hz.
- Support deep colour 30bit, 36bit, and 48bit per pixel.
- Digital audio format DTS-HD/Dolby-true-HD
- LPCM 7.1 /DTS/Dolby-AC3/DSD.



#### PACKAGE

- HDMI Splitter unit x 1
- Power Adapter x 1

#### SPECIFICATION

<b>Operating Temperature</b>	-10° to 50°C
<b>Operating Humidity</b>	5 to 90%RH (no condensing)
<b>Video Input Connectors</b>	1 x HDMI
<b>Video Output Connectors</b>	8 x HDMI
<b>Frequency Bandwidth</b>	2.97Gbps
<b>ESD / Impedance</b>	±4 - 8kV / 100Ω

<b>Standard</b>	HDMI 1.4/ HDCP 1.4
<b>Max Resolution</b>	4K2K @ 30Hz
<b>Power Supply/Consumption</b>	5 V/1A   10 W (Max)
<b>Dimension (L x W x H)</b>	118mm X 250mm X 35mm
<b>Weight</b>	720g
<b>EDID Control</b>	Auto   TV - STD Switch

OUTPUT

#### CONNECTION DIAGRAM

INPUT

