



A1PB-H6C13-16A-MC1-L

1 PHASE BASIC PDU SERIES
6 C13 Outlets / 16A
MCCB / C14 inlet

*All Pictures shown are for illustration purpose only.
Actual product may vary due to product enhancement.

Overview

Angustos Basic PDU series deliver a simple yet reliable power to critical IT equipments inside your rack cabinet. Suitable for many type of applications with a wide range of configuration that suit every solutions. For 19 inch Rack use.

Product Features

- * Simple with no configuration. Easy 2 mounting brackets for both side of rack.
- * Reliable with wide range of outlets
- * Cost efficient
- * Fully tested before delivery
- * Industrial MCCB for maximum protection.
- * Lockable outlets / Colors optional

Specification

A1PB-H6C13-16A-MC1-L


Quantity of inlet	1
Voltage	200-250V
Current	16A
VA per Input (Load capacity)	3.68kW (230V)
Frequency	50/60Hz
Over Current Protection	1 x 25A Magnetic Breakers
Materials	Rolled Steel . 1.2mm Thickness
Power Cable Length	2m, 6mm ² H05V V-F cordset
Plug Type	C14
	250V, Splashproof IP44
Receptacle/Socket Type	6 x C13
Maximum Output per Receptacle/Socket	15A for C13 - US Rated
	16A for C14 Inlet - US Rated

10A for C13 / C14 International Rated


Standard Certified

- * Comply with: CE / EMC
 - EN 62368-1
 - EN 60950-1
 - EN 55022
 - EN 55024
 - IEC 61000-4-2: 2008
 - IEC 61000-4-3: 2006+A2: 2010
 - IEC 61000-4-4: 2004
 - IEC 61000-4-5: 2005
 - IEC 61000-4-11: 2004
 - RoHS - REACH

Comply with IEC-60320 and IEC-60884-1 for outlet standard.



6 x C13



C14 Inlet

Angustos

Angustos was founded in 2000 and is now regarded as one of the foremost manufacturers of digital and analogue KVM solutions.

For more than 20 years our customers have been convinced by our core competencies in extending, switching and distributing standardised computer signals.

We are committed to established international standards. We can provide customers with complete Datacenter solutions as well as OEM/ODM services. We can cover even from medium to small business, factory & industrial, military & government, home office & personal use.


Specification

A1PB-H6C13-16A-MC1-L

Operating Temperature	-5 to 60°C
Storage Temperature	-25 to 70°C
Operating Altitude	0 to 2,000m
Storage Altitude	0 to 15,000m
Humidity	5 to 95% RH, Non-condensing
Protection type	
C13 - Quantity per breaker	6
C13 - Protection circuit	Banks of 1
C13 - Voltage per socket	230 - 250V
Chassis Dimensions (LxWxD)	465mm x 48mm x 48mm
Net weight	2.5 kg
Material	Rolled Steel - Thickness 1.2mm
Inlet	C14. 16A US - rated plug (10A International rated)
Inlet Type Cable	Terminal rated 35A/600V. 2Px6mm ² + E (4mm ²)

*Dimension and weight maybe slightly varied

PDU CIRCUIT DRAWING

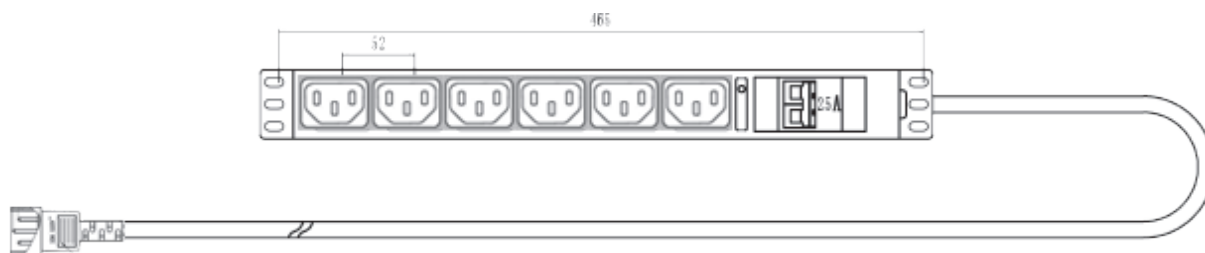

OPTIONAL COLOR CODE

A1PB-H6C13-16A-MC1-L	BASIC - DARK RAL9001
A1PB-H6C13-16A-MC1-LB	BLUE
A1PB-H6C13-16A-MC1-LR	RED
A1PB-H6C13-16A-MC1-LY	YELLOW

*Other customized color available